


Amendments to the Claims:

This listing of claims replaces all prior versions and listings of claims in the application:

Listing of Claims:

1. (Currently amended) An electroluminescent device comprising a cathode, an anode, and therebetween a layer containing a host material and an ethynyl compound of Formula (1):



in an amount sufficient to stabilize the device wherein A and B represent independently selected fused carbocyclic ring groups, wherein the layer contains a third material which emits light.

2. (Original) The device of claim 1 wherein at least one of the ring groups is an anthracene group.


3. (Original) The device of claim 1 wherein at least one of the ring groups is a phenanthrene group.

4. (Original) The device of claim 1 wherein at least one of the ring groups is a naphthalene group.

5. (Original) The device of claim 1 wherein A represents an anthracene group and B represents a naphthalene group.

6. (Original) The device of claim 1 wherein A and B represent independently selected anthracene groups.

7. (Currently amended) ~~The device of claim 1~~ An electroluminescent device comprising a cathode, an anode, and therebetween a layer containing a host material and an ethynyl compound of Formula (1):




in an amount sufficient to stabilize the device wherein A and B represent independently selected fused carbocyclic ring groups wherein the device emits green light.

8. (Original) The device of claim 1 wherein the ethynyl compound comprises at least six aromatic rings.

9. (Original) The device of claim 8 wherein the ethynyl compound comprises at least eight aromatic rings.

10. (Original) The device of claim 9 wherein the wherein ethynyl compound is represented by Formula (2):

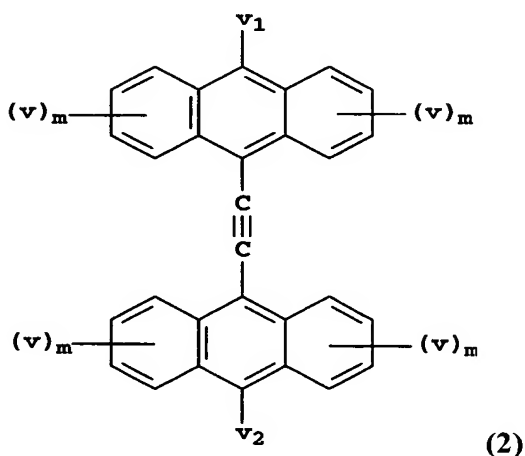

wherein:

each v independently represents a substituent, provided adjacent substituents may combine to form rings;


m is 0-4; and

v_1 and v_2 independently represent hydrogen or a substituent.


11. (Original) The device of Claim 10 wherein v_1 and v_2 represent independently selected aromatic ring groups.

12. (Original) The device of claim 10 wherein v_1 and v_2 represent independently selected phenyl ring groups.

13. (Currently amended) ~~The device of claim 1~~ An electroluminescent device comprising a cathode, an anode, and therebetween a layer containing a host material and an ethynyl compound of Formula (1):



in an amount sufficient to stabilize the device wherein A and B represent independently selected fused carbocyclic ring groups wherein the host material is represented by Formula (3a):

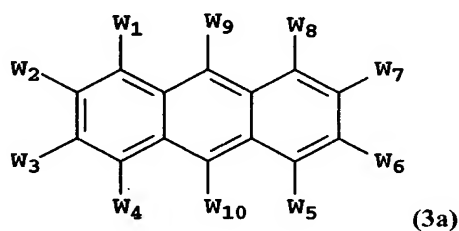


wherein:

w_1 - w_{10} independently represent hydrogen or an independently selected substituent, provided that two adjacent substituents can combine to form rings.

14. (Original) The device of Claim 13 wherein w_9 and w_{10} represent a naphthyl group and a biphenyl group, respectively.

15. (Currently amended) The device of Claim 13 wherein the host material comprises 9,10-di-(2-naphthyl)anthracene, 2-*t*-butyl-9,10-di-(2-naphthyl)anthracene, 9-(4-biphenyl)-10-(2-naphthyl)anthracene or a combination thereof 9-(4-biphenyl)-10-(1-naphthyl)anthracene.

16. (Original) ~~The device of claim 1~~ An electroluminescent device comprising a cathode, an anode, and therebetween a layer containing a host material and an ethynyl compound of Formula (1):




in an amount sufficient to stabilize the device wherein A and B represent independently selected fused carbocyclic ring groups wherein the host material is tris(8-quinolinolato)aluminum (III).

17. (Canceled)

18. (Currently amended) The device of claim 17 wherein the third material emits green light.

19. (Currently amended) The device of claim 17 wherein the third material is a quinacridone compound.

20. (Currently amended) The device of claim 17 wherein the third material is represented by Formula (4),

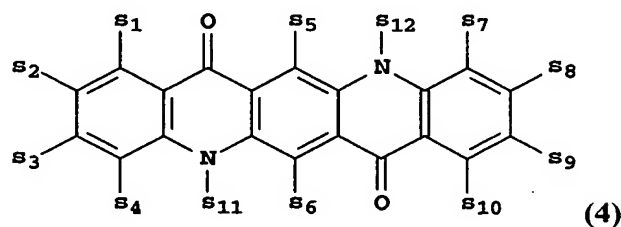

wherein:


$s_1 - s_{10}$ independently represent hydrogen or an independently selected substituent, provided adjacent substituents may combine to form rings; and

s_{11} and s_{12} independently represent an alkyl group or an aromatic group.

21. (Original) The device of claim 20 wherein $s_1 - s_{10}$ represent hydrogen, and s_{11} and s_{12} each represent an independently selected phenyl group.

22. (Currently amended) The device of claim ~~17~~ 1 wherein the third material is a coumarin compound.

23. (Currently amended) The device of claim ~~17~~ 22 wherein the third material is represented by Formula (5),

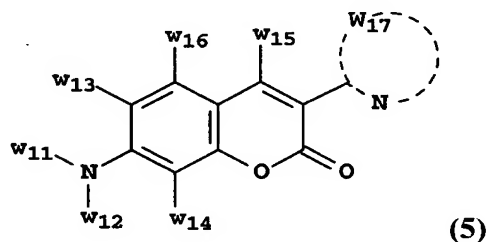

wherein:

w_{11} and w_{12} represent an independently selected substituent, provided w_{11} and w_{12} may combine with each other or with w_{13} or w_{14} to form a ring;.

$w_{13} - w_{16}$ independently represent hydrogen or an independently selected substituent, provided adjacent substituents may combine to form rings; and

w_{17} represents the atoms necessary to complete an heteroaromatic ring.

24. (Original) The device of claim 23 wherein the third material is represented by Formula (5), wherein:

w_{11} and w_{13} as well as w_{12} and w_{14} combine to form independently selected saturated rings, which may be further substituted; and

w_{17} represents the atoms necessary to complete a 2-benzothiazoyl group.


25. (Original) The device of claim 1 wherein the compound of Formula (1) is present at a level of between 0.5 and 20% by weight of the layer.

26. (Original) The device of claim 1 wherein the compound of Formula (1) is present at a level of between 0.5 and 8% by weight of the layer.

27. (Currently amended) The device of claim 1- wherein the third material is present at a level of between 0.5 and 10% by weight of the light-emitting layer.

28. (Original) A display comprising the electroluminescent device of claim 1.

29. (Currently amended) ~~The device of claim 1~~ An electroluminescent device comprising a cathode, an anode, and therebetween a layer containing a host material and an ethynyl compound of Formula (1):



in an amount sufficient to stabilize the device wherein A and B represent independently selected fused carbocyclic ring groups wherein white light is produced either directly or by using filters.

30. (Original) An area lighting device comprising the electroluminescent device of claim 1.

31. (Original) A process for emitting light comprising applying a potential across the device of claim 1.